

Square monopole microstrip antenna for WLAN Application

Nagraj Kulkarni

Assistant Professor, Deptt. of Electronics, Govt. College, Kalaburgi Karnataka, INDIA
nagrajbolewad101@gmail.com

Abstract- This paper presents the design and development of square monopole microstrip antenna for WLAN applications . The proposed antenna is excited through microstripline feed arrangement. The low cost glass epoxy substrate material is used to fabricate the antenna. The antenna operates between 5.99 GHz to 9.52 GHz giving linearly polarized broadside radiation characteristics with impedance band width of 24.4 % and a peak gain of 3.8 dB. The proposed antenna may find applications WLAN systems.

Key words: slot, microstrip antenna, triple band, gain.

1. INTRODUCTION

In this communication world the microstrip antennas are becoming increasingly popular because of their small size, light weight, low cost, easy to fabricate and compatible to microwave integrated circuits [1-2]. However, the most communication systems such as wireless local area networks (WLAN) often require antennas possessing band width to cover larger frequency spectrum ,which can avoid the use of multiple antennas. In this paper corners truncated square monopole microstrip antenna is presented for dual band operation giving better radiation characteristics. This kind of study is found to be rare in the literature.

2. DESIGNING OF ANTENNA

The conventional rectangular microstrip antenna (CRMSA) is fabricated on low cost glass epoxy substrate material of thickness $h = 1.6$ mm, loss tangent 0.02 and dielectric constant $\epsilon_r = 4.2$. The artwork of is developed using computer software AUTO CAD to

achieve better accuracy. The antennas are etched by photolithography process. The bottom surface of the substrate consists of a tight ground plane copper shielding.

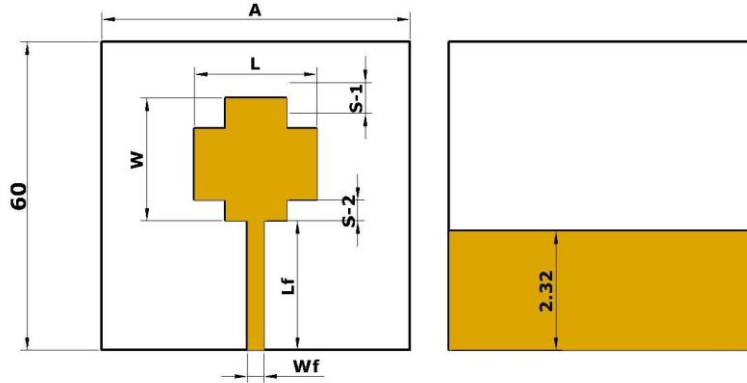


Fig. 1 Geometry of CTSMMSA

Figure 1 shows the geometry of corner truncated Square monopole microstrip antenna (CTSMMSA) This antenna is designed for the resonant frequency of 3.0 GHz using the equations available in the literature for the design of rectangular microstrip antenna on the substrate area $A \times B$. This antenna consists of a radiating patch of length L and width W . The microstripline feed of length L_f and width W_f is used to feed the microwave energy to the antenna. A 50Ω semi miniature-A (SMA) connector is used at the tip of the microstripline feed. The corners of the antenna are truncated by $S-1= 6$ mm and 6 mm, while $S-2= 6$ mm and 4 mm in X and Y axes respectively. Figure 2 shows the Photograph of the antenna. The designed parameters are tabulated in Table No 1.

Table No 1

| Antenna | Parameters(cm) | | | | | |
|---------|----------------|---|------|------|-------|-------|
| | A | B | W | L | L_f | W_f |
| CTSMMSA | 6 | 6 | 2.39 | 2.39 | 1.26 | 0.32 |

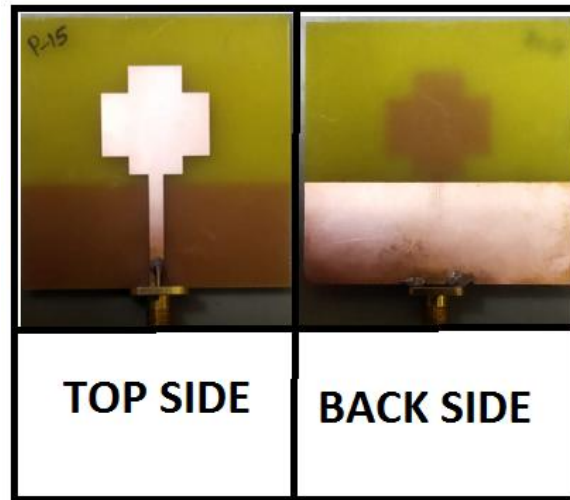


Fig. 2 Photograph of CTSMMSA

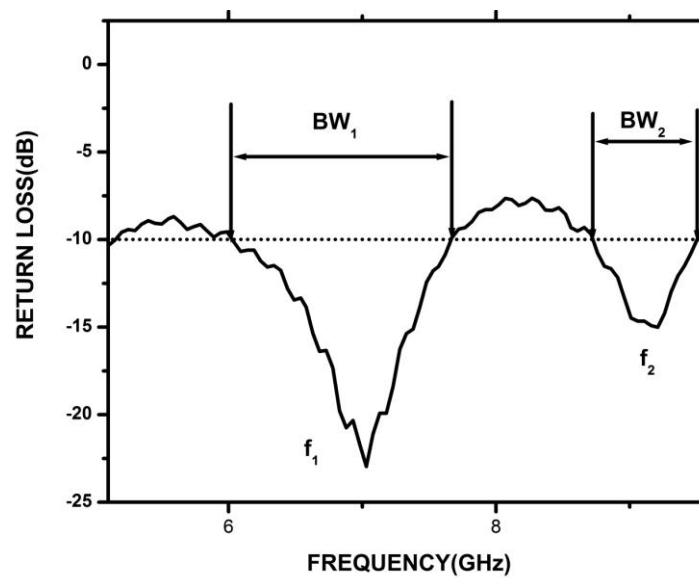


Fig. 3 Variation of return loss versus frequency of CTSMMSA

Figure 3 shows the variation of return loss versus frequency of CTSMMSA

It is seen from this figure that the antenna resonates for dual bands f_1 of bandwidth $BW_1 = 24.7\%$ (7.68 GHz-5.99 GHz) and f_2 of bandwidth $BW_2 = 8.7\%$ (9.52 GHz-8.72 GHz).

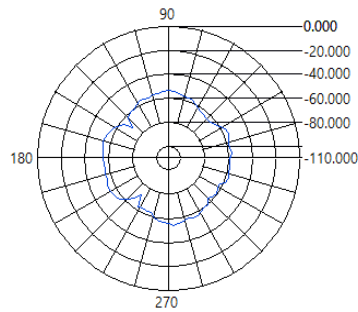


Fig. 4 radiation pattern of CTSMMSA

Figure 4 shows the radiation pattern CTSMMSA it is seen from these figure that the pattern is linear and broad sided. The gain of the proposed antenna is measured by absolute gain method. The power transmitted ‘ P_t ’ by pyramidal horn antenna and power received ‘ P_r ’ by antenna under test (AUT) are measured independently. With the help of these experimental data, the gain (G) dB of AUT is calculated by using the equation,

$$(G) \text{ dB} = 10 \log \left(\frac{P_r}{P_t} \right) - (G_t) \text{ dB} - 20 \log \left(\frac{\lambda_0}{4\pi R} \right) \text{ dB}$$

where, G_t is the gain of the pyramidal horn antenna and R is the distance between the transmitting antenna and the AUT. The maximum gain CTSMMSA measured in its operating bands is found to be 3.8 dB.

4. CONCLUSION

From the detailed study, it is concluded that, the CTSMMSA can be made to operate dual bands between 5.99 GHz to 9.52 GHz by truncating the corners of the radiating patch. The maximum bandwidth of 24.4 % is achieved with linear broad side radiation pattern. The peak gain of 3.8 dB is achieved by the CTSMMSA. The proposed antenna is simple in its geometry and can be fabricated using low cost glass epoxy substrate material. This antenna may find applications WLAN systems.

REFERENCES

1. Kin-Lu Wong, Compact and Broad band microstrip Antennas, A Wiley-Inter Science Publication, John Wiley & Sons. Inc.
2. Garg Ramesh , Bhatia Prakesh, Bahl Inder and Boon Apisakittir (2001), Microstrip Antennas Design Hand Book, Artech House Inc.
3. Behera. S and Vinoy. K. J, “Microstrip square ring antenna for dual band operation,” Progress In Electromagnetics Research, PIER 93, 41–56, 2009.
4. Roy . J. S, Chatteraj, and N. Swain, “ short circuited microstrip antenna for multi-band wireless communications,” Microwave and Optical Technology Letters, Vol .48, 2372-2375, 2006.
5. Sadat, S , M. Fardis F. Geran, and G. Dadashzadeh,” A compact microstrip square-ring slot antenna for UWB applications,” Progress In Electromagnetic Research PIER 67, 173-179, 2007.
6. Shams. K. M Z , M. Ali, and H. S. Hwang, “A planar inductively coupled bow-tie slot antenna for WLAN application,” Journal of Electromagnetic Waves and Applications, Vol.20, 86-871, 2006.
7. Bahl, I. J and P. Bhartia, Microstrip Antennas, Artech house, New Delhi, 1980.

Author Bio data



Nagraj Kulkarni received his M.Sc , M.Phil and Ph.D degree in Applied Electronics from Gulbarga University Gulbarga in the year 1995,1996 and 2014 respectively. He is working as a Assistant professor in the Department of Electronics Government College Autonomous Kalaburgi. He is an active researcher in the field of Antennas.