

THE EFFECT OF MODELING THE NEAR WALL ZONE ON THE FLOW BEHAVIOR

Sabah Tamimi*

Abstract: Turbulent flow with a one equation model used to depict the turbulent viscosity of confined flow in a smooth straight channel has been tested when a finite element technique based on a zone close to a solid wall has been adopted for predicting the distribution of the pertinent variables in this zone. Also, the case of expanding the near wall zone away from the wall has been examined. The validation of imposed technique has been tested and well compared with other techniques where combination of pressure and Couette flow were examined.

Keywords: Pressure flow, combination of pressure and Couette flow, expanding the near wall zone.

1. INTRODUCTION

It is well known that the equations governing fluids motion are known as Navier-Stokes equations which can apply to wide range of computer science and engineering disciplines. An analytical solution of these equations is intractable due to their complexity. During the last three decades, attention has been focused on the numerical simulation of flow process, the so called computational fluid dynamics (CFD), which used with confidence to solve a large range of flow problems especially where experimentation is extremely difficult to obtain. It is known that when a fluid enters a prismatic duct the values of the pertinent variables change from initial profile to a fully developed form, which is thereafter invariant in the downstream direction. The analysis of this region, which is known as developing region, has been the subject of extensive studies. Numerous theoretical and experimental works are available on laminar flow [1-4], but this is not the case of turbulent flow are still few since it has not been possible to obtain exact analytical solutions to such flows. Therefore, an effective technique is required to model the variation of the pertinent variables near a solid boundary, where the variation in velocity and kinetic energy, in particular, is extremely large near such surfaces since the transfer of shear from the boundary into the main domain and the nature of the flow changes rapidly. Consequently, if a conversational finite element is used to model the near wall zone (N.W.Z.), a significant grid refinement would be required. Indeed, in most situations this would be so fine as to be impractical.

Several solution techniques have been suggested in order to avoid such excessive refinement [5-7]. A more common approach is to terminate the actual domain subject to discretisation (main domain) at some small distance away

from the wall, where the gradients of the independent variables are relatively small, and then use another technique to model the flow behavior in the NWZ. In this paper, a different near wall zone modeling techniques is used to simulate turbulent flow in a smooth straight channel.

2. GOVERNING EQUATIONS

The Navier-Stokes (N-S) equations described steady - state, incompressible two dimensional turbulent flow of a Newtonian viscous fluid with no body forces acting are,

$$\rho u_j \frac{\partial u_i}{\partial X_j} = -\frac{\partial p}{\partial X_i} + \frac{\partial}{\partial X_j} \left[\mu_e \left(\frac{\partial u_i}{\partial X_j} + \frac{\partial u_j}{\partial X_i} \right) \right] \quad (1)$$

Where $i, j = 1, 2$. u_i, p are the time - averaged velocities and pressure respectively, ρ is the fluid density, μ_e is the effective viscosity which is given by $\mu_e = \mu + \mu_t$, and μ_t are the molecular viscosity and turbulent viscosity, respectively. The flow field must satisfy the continuity equation, which may be written as:

$$\frac{\partial u_i}{\partial X_i} = 0 \quad (2)$$

Equation (1) and (2) cannot be solved unless the turbulent contribution to μ_e be provided. The simplest model is via an algebraic formula [8] which has limited application and therefore this model is not adopted in the present work, but an alternative (Prandtl [9]-kolmogorov [10]) model is used in which,

$$\mu_t = C_\mu \rho k^{1/2} l_\mu \quad (3)$$

Where k is the turbulence kinetic energy, l_μ is the length scale which is taken as 0.4 times the normal distance from the nearest wall surface. The distribution of k can be evaluated by transport equation;

* College of Computing, AlGhurair University, Dubai United Arab Emirates, E-mail: sabah@agu.ac.ae

$$\rho u_j \frac{\partial k}{\partial x_j} = \frac{\partial}{\partial x_j} \left[\left(\mu + \frac{\mu_t}{\sigma_k} \right) \frac{\partial k}{\partial x_j} \right] + \mu_t \frac{\partial u_i}{\partial x_j} \left[\frac{\partial u_i}{\partial x_j} + \frac{\partial u_j}{\partial x_i} \right] - E \quad (4)$$

Where $E = C_D \rho k^{3/2} / l_u$, μ_t / σ_k is the turbulent diffusion coefficient, σ_k is the turbulent prandtl or Schmidt number and C_D is a constant. The governing equations 1, 2 and 4 is called the one-equation (k -1) model. Within the main domain the governing equations have been discretised by using the standard finite element method [11] and Galerking weight residual approach is adopted to solve the discretised equations. Within the near wall zone, either conventional finite element can be used, however an excessive mesh refinement was needed which is expensive in computer time and memory, or universal laws [12] to bridge from a solid boundary to the main domain (Figure 1). In the present work, a finite elements technique has been adopted, using one-dimensional normal to the wall (Figure 2).

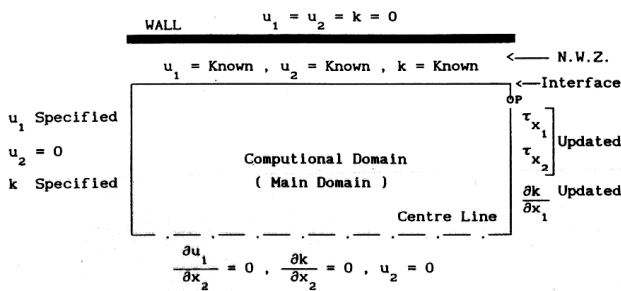


Figure 1: Boundary Conditions when the Mesh is Terminated at Small Distance Away from the Wall

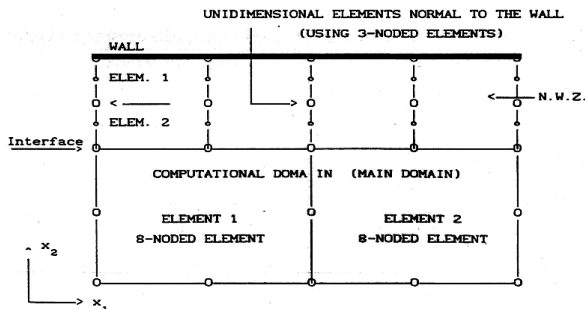


Figure 2: One-dimensional Elements in one-direction Normal to the Wall Used in the N.W.Z.

3. BOUNDARY CONDITIONS

In the present work, two types of turbulent flow are considered. These are pressure and pressure plus Couette flow. In both, fully developed Dirichlet conditions are assumed on all variables upstream. No slip condition were imposed on solid boundaries and tractions updated downstream. Tractions are given by,

$$\tau_{x_1} = -p + \frac{\mu_e}{\rho} \left(\frac{\partial u_1}{\partial x_1} \right) \quad x_1\text{-parallel to walls}$$

$$\tau_{x_2} = \frac{\mu_e}{\rho} \left(\frac{\partial u_2}{\partial x_1} + \frac{\partial u_1}{\partial x_2} \right) \quad x_2\text{-normal to walls}$$

4. RESULTS AND DISCUSSION

Two examples were used to validate the imposed wall element technique was tested and comparisons made with other accepted techniques and experimental results [14] when fully developed turbulent flow is considered in a parallel-sided duct of width D , which is taken as 1.0, and L is the channel length. Compatible fully developed velocity and kinetic energy profiles were imposed as initial upstream values and outlet values from the previous iteration used as new approximation to the values at the inlet until a converged condition is satisfied. Different Reynolds number based upon the width of the channel of 12.000, 50.000 and 70.000 were considered.

The first example was concerned with an analysis of pressure flow where both walls of the channel are fixed. Figure 3 shows convergent velocity profiles at the outlet which clearly shows that the velocity values obtained by universal profiles have some discrepancy from those obtained from the advocated technique. It is clearly that, the presently advocated technique exhibits excellent agreement with the correct solution which resulted from the complete mapping. These are, superior to those obtained using universal laws. Figure 4 shows excellent agreement between the imposed technique and experimental results [14]. Figure 5 refer to the kinetic energy, which prove once more, the "correct" values are remarkably close to those obtained from the proposed technique.

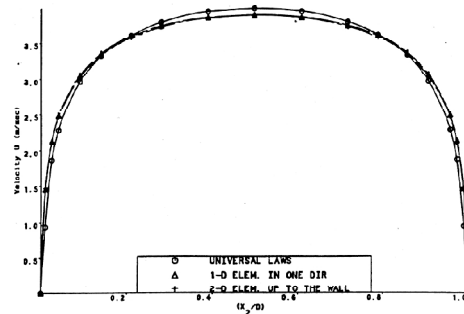


Figure 3: Turbulent Velocity Profiles for Fully-Developed Flow, at 8D Downstream, $L = 8D$, $Re = 50.000$

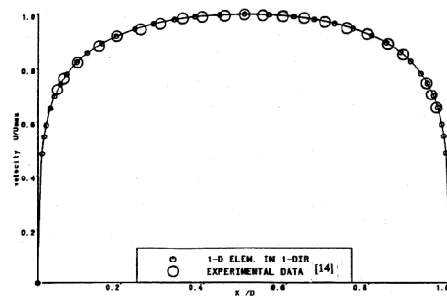


Figure 4: Turbulent Velocity Profiles for Fully-Developed Flow, at 8D Downstream, $L = 8D$, $Re = 50.000$

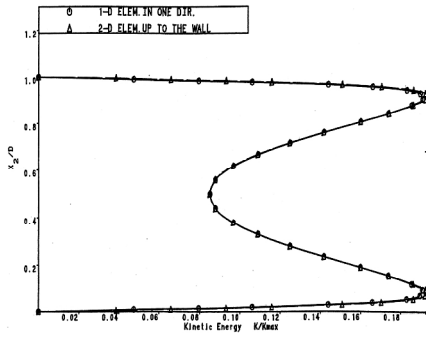


Figure 5: Kinetic Energy Profiles for Fully-developed Turbulent Flow, at 8D Downstream, L = 8D, Re = 12.000

The next stage was concerned with the validation of the wall element technique in an extended near wall zone when the interface located at 0.48D and 0.47D from the symmetric line as shown in Figure 6, Which representing the downstream kinetic energy. Obviously the results obtained from the adoption of 1-D elements in one direction is still the most advantageous owing to the number of elements used in the N.W.Z. Also, the location of the near wall zone limit does not seem to affect the values of the pertinent variables. This is a distinct advantage over the universal law approach where strict limits must be placed on the location the interface.

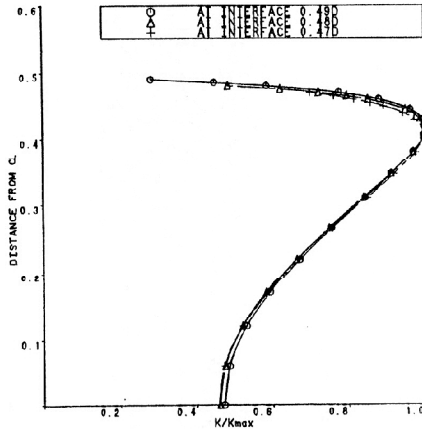


Figure 6: Downstream Fully-developed Kinetic Energy Profiles for Turbulent Flow When the N.W.Z. is Extended up 0.47D

The second example was concerned with an analysis of combining pressure and Couette flow, with the lower surface stationary and upper surface moving at a constant speed. Fully developed turbulent velocity profiles and turbulent kinetic energy distribution were obtained and presented in Figure 7 and 8, respectively, these show comparisons with universal laws and experimental results [14]. Once more, the results obtained from the adoption of the wall element technique are significantly better than those obtained using the universal laws, and compare favorably with experimental results.

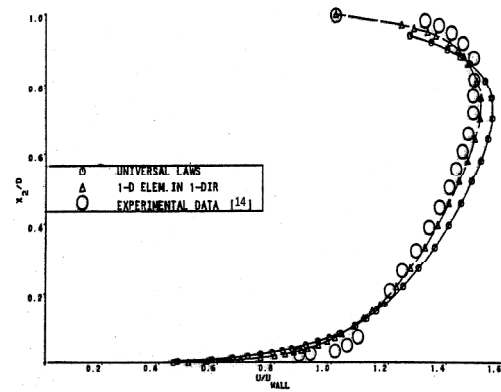


Figure 7: Velocity Profiles for Fully-developed for Turbulent flow with Fixed Lower Surface and Moving Upper Surface, Re = 70.000

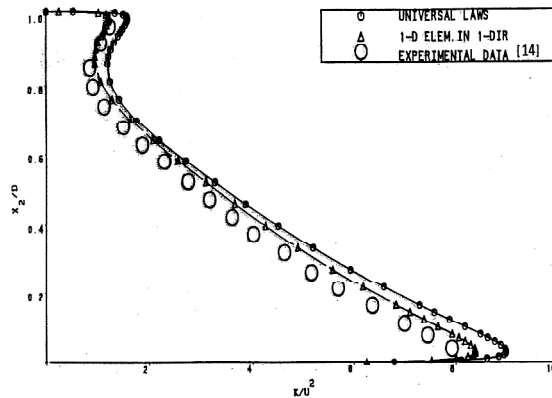


Figure 8: Fully-developed Kinetic Energy Profiles for Turbulent Flow with Fixed Lower Surface and Moving Upper Surface, Re = 70.000

5. CONCLUSIONS

The general use of 2-D elements up to the wall is not economically viable and the utilization of empirical universal laws is not valid since these laws are only really applicable for certain unidimensional flow regimes. Therefore to avoid such an excessive refinement, these methods have been replaced by introducing a wall element technique, based on the use of the finite element methods which has shown an excellent results, when the fully-developed flow considered for both types of flow pressure and combination of pressure and Couette.

Again, the validation of the wall element technique in an extended near wall zone has shown more advantages comparing to the use of universal laws. Therefore, the imposed technique can be used with confidence for fully-developed turbulent flow.

REFERENCES

[1] Wiginton C.L. and Dalton C., "Incompressible Laminar Flow in the Entrance Region of a Rectangular Duct, *J. Appl. Mech.*, **37**, pp. 854-856, 1970.

- [2] Sparrow E.M., Hixoin, C.W. and Shavit, G., Experiments on Laminar Flow Development in Rectangular Duct, *J. Basic Eng.*, **89**, pp. 116-124 (1967).
- [3] D.M. Hawken, H.R. Tamaddon-Jahromi, P. Townsend and M.F. Webster, "A Taylor-Galerkin Based Algorithm for Viscous Incompressible Flow", *Int. Journal Num. Meth. Fluids*, 1990
- [4] Mehrotra, A.K. and Patience. G.S., "Unified Entry Length for Newtonian and Power Law Fluids in Laminar Pipe Flow", *J. Chem. Eng.*, **68**, pp. 529-533, 1990.
- [5] Launder B.E. and Shima N., "Second Moment Closure for Near Wall Sublayer: Development and Application", *AIAA Journal*, **27**, pp. 1319-1325, 1989
- [6] Haroutunian, and Engelman, S., "On Modeling Wall-bound Turbulent Flows Using Specialized Near-wall Finite Elements and the Standard $k-\epsilon$ Turbulent Model", *Advances in Num. Simulation of Turbulent Flows*, *ASME*, **117**, pp. 97-105, (1991).
- [7] Graft T., Gerasimov A., Iacovides H., Launder B., "Progress in the Generalization of Wall-function Treatments", *Int. Journal for Heat and Fluid Flow.*, pp. 148-160, 2002.
- [8] Launder, B.E. and Spalding, D.B., "Lectures in Mathematical Models of Turbulence", *Academic Press*, 1972.
- [9] Prandtl, L., "Uber ein Neues Forelssystem fur die Ausgebildete Turbulenze", *Nachr. Akad. Der Wissenschaft*, Gottingesn, 1945.
- [10] Kolmogrov, A.H., "Equations of Turblent Motion of an Incompressible Fluid", *IZV Akad Nauk, SSSR Ser. Phys*, **Volume 1-2**, pp. 56-58, 1942.
- [11] Taylor, C. and Hughes, T.G., "Finite Element Programming of the Navier-Stokes Equation", Pineridge Press, 1981.
- [12] Davies, T. J., "Turbulent Phenomena", Academic Press, 1972.
- [13] Schneider, G.E., Raithby, G.D. and Kovanovich, M., "Finite Element Analysis of Incompressible Fluid Flows Incorporating Equal Order Pressure and Velocity Interpolation", *Proc. Int. Conf. Num. Meth. in Laminar and Turbulent Flow*, *Pentech Press*, London, pp. 89-102, 1978.
- [14] Nayak, U.S.L. and Stevens, S.J., "An Experimental Study of the Flow in the Annular Gap Between a Long Vehicle and a Low Close-fitting Tunnel", *Report: Dept. of Technology, Loughborough University of Technology*, 1973.